



The evolution of a success story.

## XLED home 2

The moveable sensor-switched outdoor floodlight with fully swivelling LED panel in a classy opal look. The XLED home 2 sensor-switched floodlight comes in a sophisticated design. It is not just an eye-catcher, but also a truly talented mover. Thanks to the fully swivelling LED panel, every corner of the entrance area can be illuminated flexibly and as required. The highly efficient LED technology coupled with the opal cover provides maximum lighting comfort. As an individual floodlight or interconnected with the slave version, the innovative new generation of the XLED home success series is available in white, black, graphite and silver.

**LED 14.8W**  4000K neutral/white  140°  max. 14m  2-2000 lux  8sec-35min  connectable via cable

30 years (L70B10)  1184lm  80lm/W

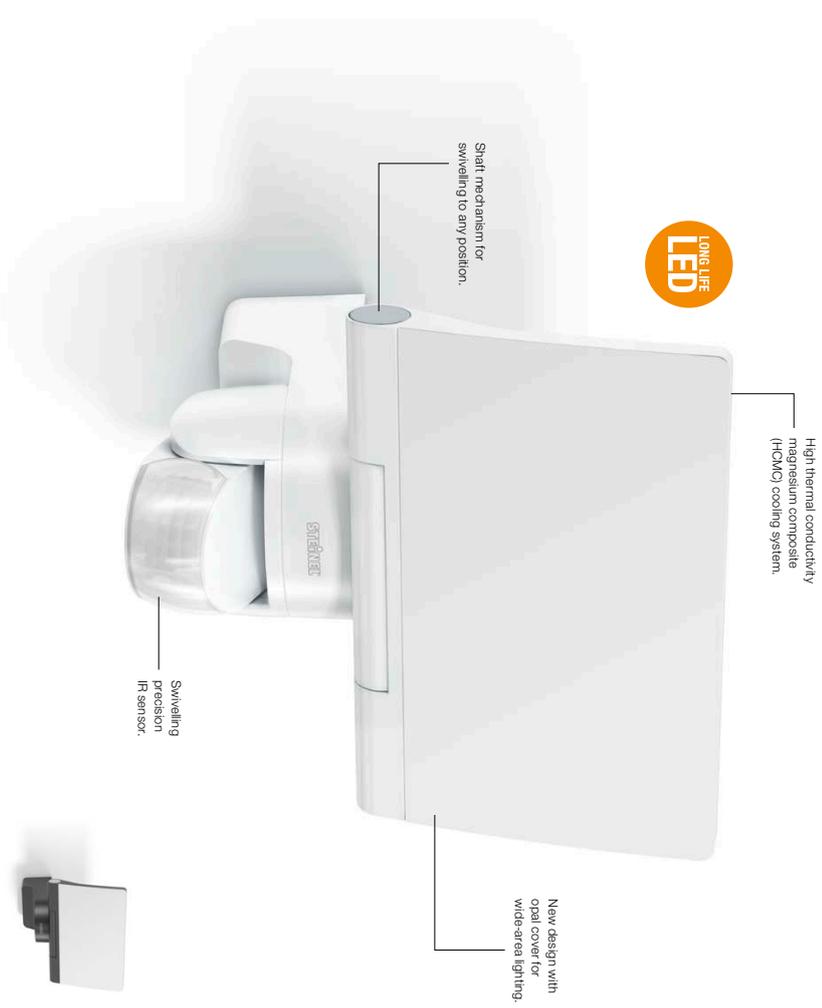

**Technical specifications**

Dimensions: (H x W x D) 194 x 180 x 161 mm\*  
 Dimensions: (H x W x D) 181 x 180 x 161 mm  
 Power supply: 230-240 V, 50 / 60 Hz  
 Sensor Type: Passive infrared\*  
 Output: 14.8 W  
 Brightness: 1184 lm  
 Efficiency: 80 lm/W  
 Colour temperature: 4000 K / SDCM 3  
 Colour rendering: Ra ≥ 80  
 LED life expectancy: 50,000 h (L70B10 to LM80)  
 LED cooling system: HCMC  
 (High thermal conductivity magnesium composite)  
 Floodlight swivelling range: 180°

Also available as a slave version without sensor.

**XLED home 2**  
 EAN white 4007841 033088  
 EAN black 4007841 033071  
 EAN graphite 4007841 033064  
 EAN silver 4007841 033057

**XLED home 2 SL (without sensor)**  
 EAN white 4007841 033125  
 EAN black 4007841 033118  
 EAN graphite 4007841 033095  
 EAN silver 4007841 033101

\*Sensor version