

## The new benchmark. Now with basic light. **RS PRO LED R1**


Meeting great expectations on aesthetic appeal and technology is actually quite hard to do on a tight budget. We have managed to do precisely this balancing act with the RS PRO LED R1. This is where attractive design meets cutting-edge LED and high-frequency sensor technology in STEINEL quality. Including Easy Install function and pleasant basic light. And all at a truly attractive price. You'll be surprised. And then stunned.

**LED 11w**

- 30 years (04.5h/day)
- 890lm 81lm/W
- 3000K neutral-white
- 4000K warm-white
- 360°
- Ø1 - 8m
- 2 - 2000 Lux
- 5sec - 15min

**5 JAHRE GARANTIE**

- Softlicht-start
- basic brightness
- manual override
- functional warranty

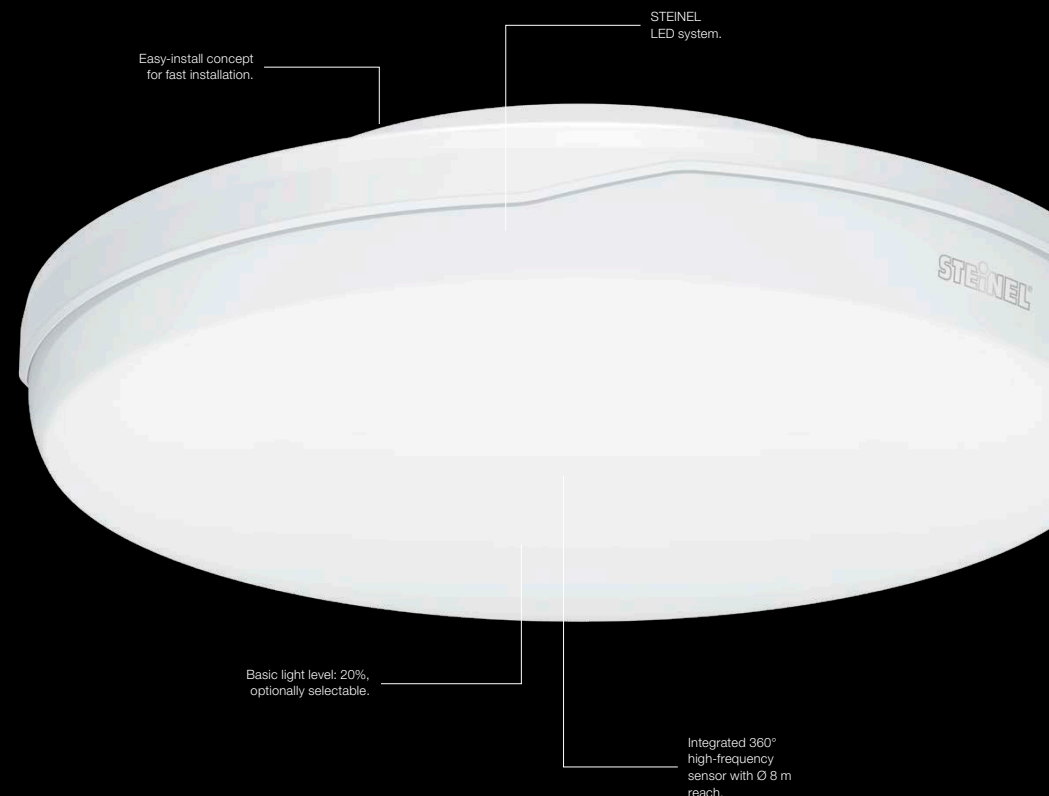

**Technical specifications**  
 Dimensions: (H x W x D): ø 270 x 70 mm  
 Power supply: 220 - 240 V, 50 / 60 Hz  
 Output: 11 W  
 Brightness: 890 lm  
 Efficiency: 81 lm/W  
 Colour temperature: 3000 K, 4000 K / SDCM 3  
 Colour rendering: Ra ≥ 80  
 LED life expectancy: 50,000 h (L70B10 to LM80)  
 LED cooling system: Passive Thermo Control  
 Sensor technology: high frequency  
 Angle of coverage: 360°  
 Reach: Ø 1 - 8 m  
 Twilight setting: 2 - 2000 lux

Time setting: 5 sec- 15 min  
 Basic light level: optional, 20%  
 Soft light start: Yes  
 Manual override: 4 hours, selectable  
 IP rating / protection class: IP 20 / II  
 Material: UV-resistant plastic  
 Temperature range -10°C to +50°C

**RS PRO LED R1**  
**3000 K**  
 EAN white 4007841 728323  
 EAN silver 4007841 007377  
**4000 K**  
 EAN white 4007841 728354  
 EAN silver 4007841 007378